



SYSTEM FOR DRY-WALL CONSTRUCTION VICONNECT

PRODUCT INFORMATION

1 . POSITION

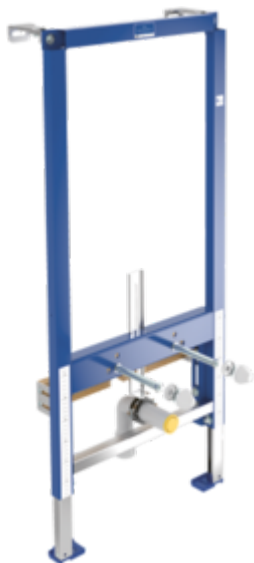

| | |
|--------------|---|
| Model | 922148 |
| Collection | ViConnect |
| PROJECTS |  PLUS |
| Width | 525 mm |
| Height | 1120 mm |
| Depth | 100 mm |
| Weight | 10,5 kg |
| description | <p>for covering with plasterboard, installation onto a solid brick wall, in dry-wall constructions etc., adjustment range of feet from unfinished floor level to upper edge of finished floor level: 0-200mm, adjustment range front to wall: 135-205mm (when mounted on wall brackets)</p> <p>with wall brackets, incl. self-locking feet with adjustable base plates and fastening materials, installation instructions</p> <p>individual packaging materials</p> <p>self-supporting powder-coated steel frame, fully pre-assembled</p> <p>universally adjustable for bidet ceramics, with multiply bonded laminated wood panel and scaling for the free positioning of drinking water pipe wall panels, with universal waste bend DN 50 (Ø 50) / DN 40 (Ø 40), incl. rubber collar DN 40 (Ø 40) / DN 32 (Ø 32) and protection plugs, with 2 x M12 retaining bolts adjustable 180/230 mm with protection plugs, nuts and white covers, with sound-absorbing clamp</p> <p>for dry-wall construction, standard height</p> |



PROJECTS

Specification texts

ViConnect; Bidet installation system; Size: 525 x 1120 x 100 mm; for covering with plasterboard, installation onto a solid brick wall, in dry-wall constructions etc., adjustment range of feet from unfinished floor level to upper edge of finished floor level: 0-200mm, adjustment range front to wall: 135-205mm (when mounted on wall brackets); with wall brackets, incl. self-locking feet with adjustable base plates and fastening materials, installation instructions; individual packaging materials; self-supporting powder-coated steel frame, fully pre-assembled; universally adjustable for bidet ceramics, with multiply bonded laminated wood panel and scaling for the free positioning of drinking water pipe wall panels, with universal waste bend DN 50 (Ø 50) / DN 40 (Ø 40), incl. rubber collar DN 40 (Ø 40) / DN 32 (Ø 32) and protection plugs, with 2 x M12 retaining bolts adjustable 180/230 mm with protection plugs, nuts and white covers, with sound-absorbing clamp; for dry-wall construction, standard height

COLOURS

92214800 4051202497613

TECHNICAL DRAWINGS

922148

